

SPECIFICATIONS

MATERIAL

The B-6 bollard is fabricated with 5" .120 wall square tube fully welded to a 1/2 x 6" square steel top. Four 1/2 x 3 1/2 separate panels are attached with two vandal resistant 1/2" stainless steel pinned buttonhead bolts. For permanent embed bollards the panels are fabricated with mild steel; for removable bollards the panels are fabricated with aluminum.

PROTECTIVE COATINGS

Powder Coating: Following fabrication bollards shall be cleaned and treated with an iron phosphate process prior to the coating application. The protective coatings shall be either polyester or polyester TGIC powder. The coating shall be a minimum of 4 mils thick on all surfaces.

Note: Unless otherwise specified, bollards shall be powder coated a standard FairWeather color.

Hot Dip Galvanizing: Following Fabrication, The receivers (removable bollards only) shall be hot dip galvanized to meet standard ASTM A123, 3 to 4 mils thick.

Options: .180 or .250 wall steel tube, recessed detailing on panels, eye bolts
 Removable only: receiver covers, lock well covers, brass padlocks
 Mounting: Surface, removable or permanent embed

REV 8-29-07


B-6 Bollard with Surface Mount Option

FairWeather Site Furnishings

360-895-2626 or Toll Free 800-323-1798

Port Orchard, Washington

©1999-2007 Leader International Corporation,
 FairWeather Site Furnishings division

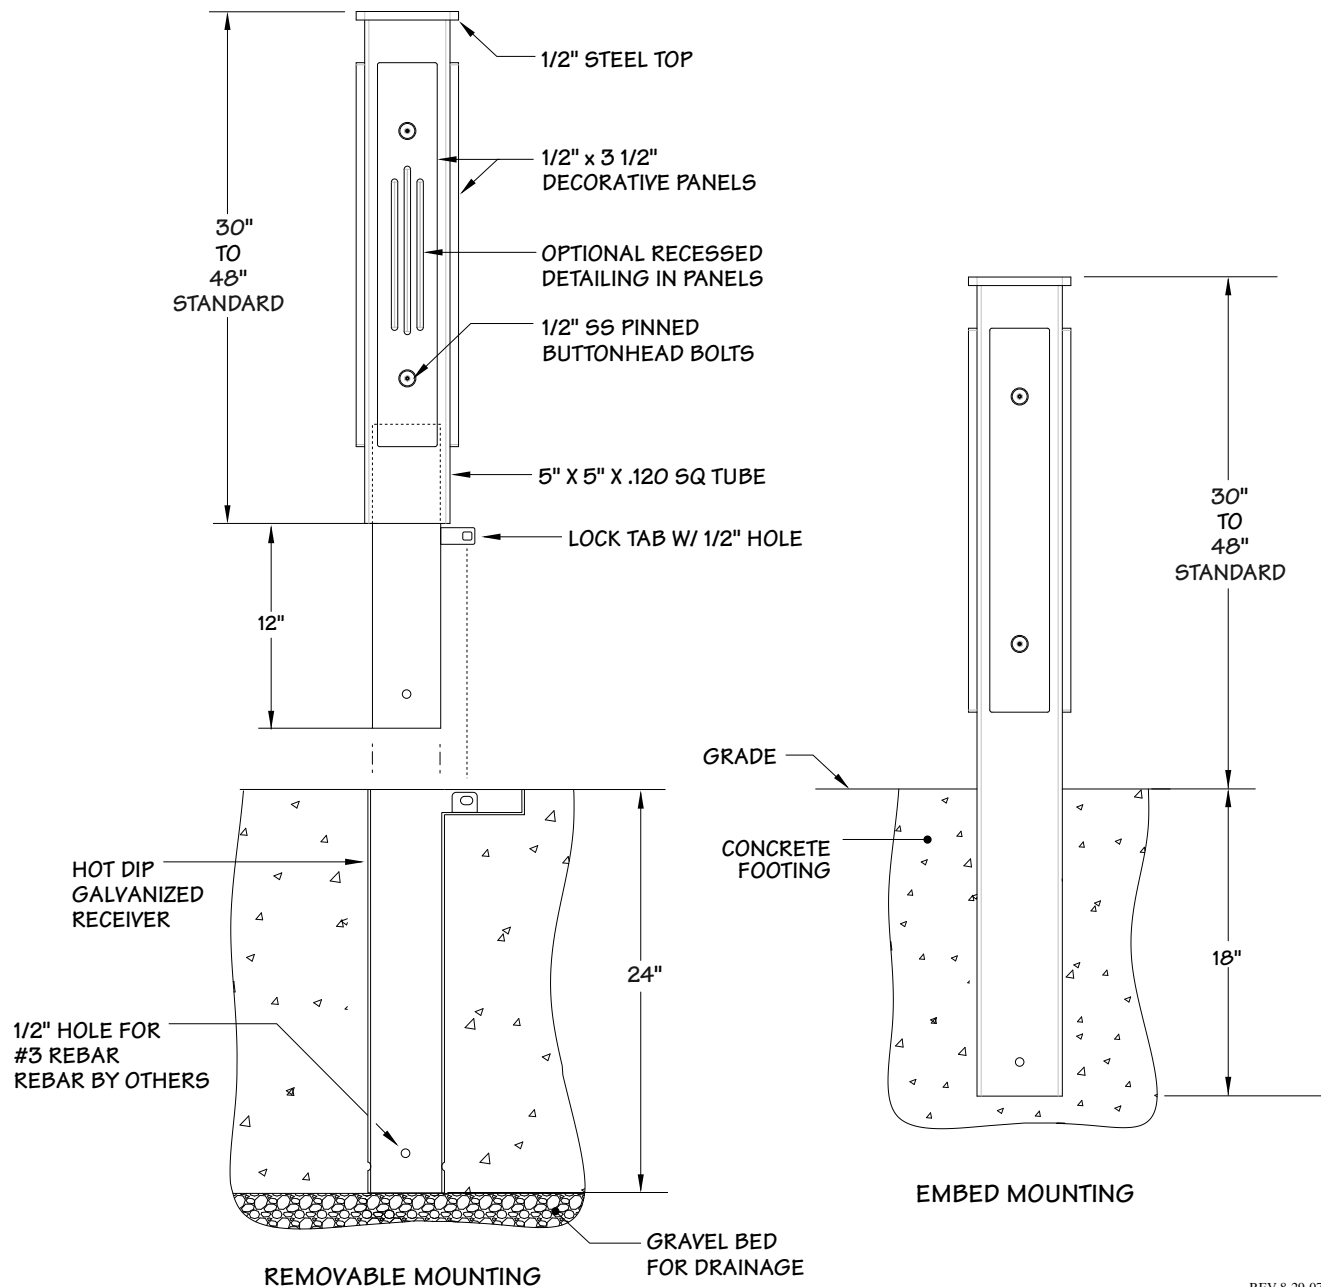

SPECIFICATIONS

MATERIAL

The B-6 bollard is fabricated with 5" .120 wall square tube fully welded to a 1/2 x 6" square steel top. Four 1/2" x 3 1/2" separate panels are attached with two vandal resistant 1/2" stainless steel pinned buttonhead bolts. For permanent embed bollards the panels are fabricated with mild steel; for removable bollards the panels are fabricated with aluminum.

PROTECTIVE COATINGS

Powder Coating: Following fabrication bollards shall be cleaned and treated with an iron phosphate process prior to the coating application. The protective coatings shall be either polyester or polyester TGIC powder. The coating shall be a minimum of 4 mils thick on all surfaces.

Note: Unless otherwise specified, bollards shall be powder coated a standard FairWeather color.

Hot Dip Galvanizing: Following Fabrication, The receivers (removable bollards only) shall be hot dip galvanized to meet standard ASTM A123, 3 to 4 mils thick.

Options: .180 or .250 wall steel tube, recessed detailing on panels, eye bolts

Removable only: receiver covers, lock well covers, brass padlocks

Mounting: Surface, removable or permanent embed

Note: Depth and diameter of installation hole may vary with soil conditions. Consult project engineer for correct dimensions.

REV 8-29-07

Model B-6 Bollards

FairWeather Site Furnishings

360-895-2626 or Toll Free 800-323-1798

Port Orchard, Washington

©1999-2007 Leader International Corporation,
FairWeather Site Furnishings division